

## COR VISION

SYSTEM

### Sightlines

Frame depth 116 mm / 182 mm 3 rails

Sash 37 mm

Interlock 20 mm

### Polyamide Strip Length

16 / 24 mm

### Profile Thickness

Door 1.7 mm

### Glazing

Max. 30 mm, Min. 26 mm

### Maximum Sash Dimensions

Width (L) 2500 mm, Height (H) 3000 mm

### Maximum Sash Weight

320 kg

Consult maximum weight and dimensions according to typologies



COR VISION SYSTEM



Thermally broken minimalist sliding system that provides maximum luminosity with a minimal aluminium interlock profile. It has an elegant design only 20 mm sightline and offers the possibility of an inlaid closing system and of hiding the frame along the perimeter.

Possibility of locking system in the interlock, thus allowing the concealment of the sashes in the frame from a frontal view.

Possibility of embedded locking system which facilitates the sashes crossing.

- High thermal & acoustic performance
- Maximized glazed surface
- Stainless steel adjustable wheels
- 20 mm interlock
- Hidden track possibility

**BFRC Rating**  
kWh/(m<sup>2</sup>yr)

≥20	A ++
>10 to 20	A +
0 to <10	A ✓
-10 to <0	B
-20 to <-10	C
-30 to <-20	D
-50 to <-30	E

Double glazing



**FEATURES**

Transmittance		Uw ≥ 1.3 (W/m <sup>2</sup> K)
Acoustic insulation		Rw up to 41 dB
Air permeability		Class 4
Water tightness		Class 7A
Wind resistance		Class C5


Reference test 1.23 x 1.55 m / 1 sash + 1 fixed light



INTERLOCK HANDLE




SECURITY HARDWARE




FLUSH SECURITY HARDWARE


**HIDDEN TRACK SOLUTION**

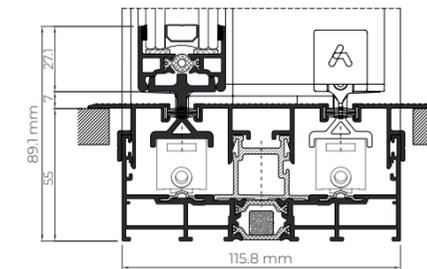


**BESPOKE DRAINAGE SOLUTION**

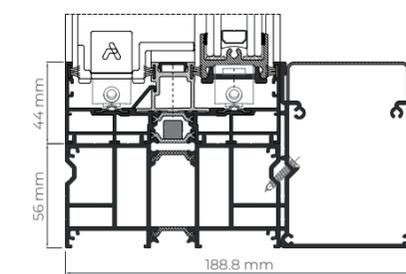


**INTERLOCK HANDLE**

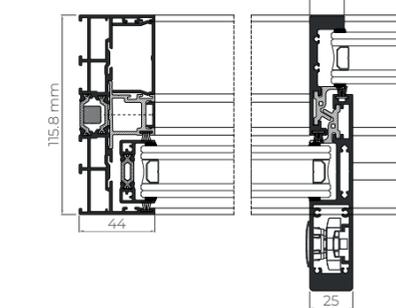

**DOUBLE TRACK**

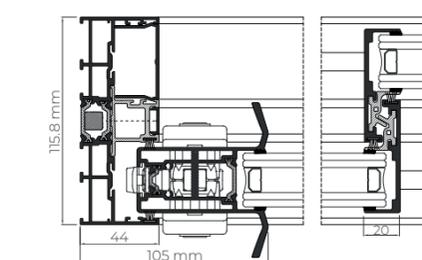

**OPENING POSSIBILITIES**

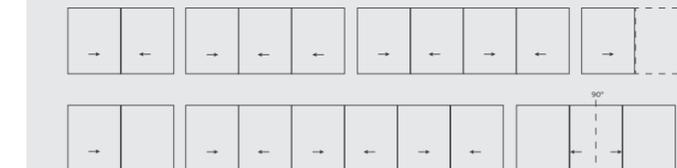

- Sliding
- Possibility of 1, 2 or 3 rails
- Possibility of interior and exterior corner sash at 90° without mullion
- Pocket possibility

**POSSIBILITIES**



ACCESSIBILITY



HIDDEN TRACK SOLUTION